


机械三通

EX31、EX32

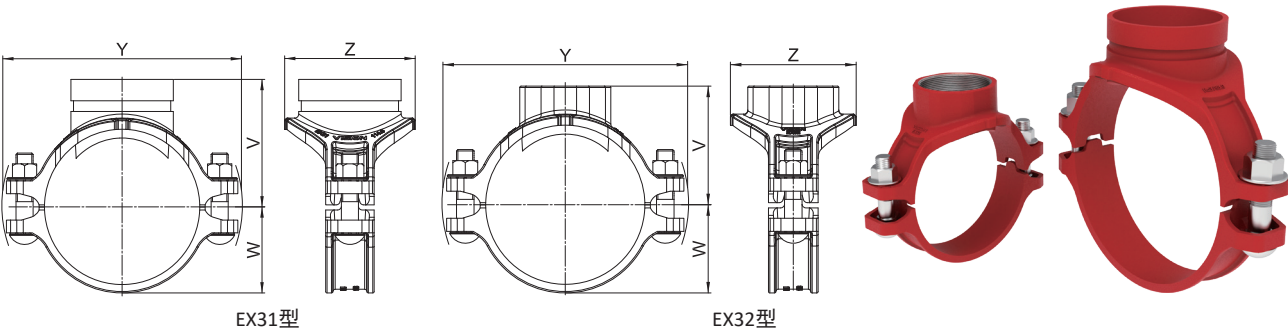

规格 mm		工作压力	开孔直径 mm		螺栓/螺母		T	V mm		W	Y	Z	约重 kg	
公称直径	实际外径	Mpa	要求	最大	规格	数量	mm	EX31	EX32	mm	mm	mm	EX31	EX32
65 × 25	76.1 × 33.7	2.5	38.1	41.3	M10x55	2	46	-	63	45	128	64	-	0.6
		2.5	44.5	47.6	M10x55	2	47	-	65	45	128	70	-	0.7
		2.5	50.8	54.0	M10x55	2	47	-	65	45	128	76	-	0.7
80 × 25	88.9 × 33.7	2.5	38.1	41.3	M10x55	2	53	-	69	51	142	65	-	0.7
		2.5	44.5	47.6	M10x55	2	53	-	71	51	142	72	-	0.7
		2.5	50.8	54.0	M10x55	2	53	-	72	51	142	77	-	0.8
		2.5	63.5	66.7	M10x55	2	53	-	75	51	142	89	-	0.9
100 × 25	114.3 × 33.7	2.5	38.1	41.3	M12x65	2	66	-	80	64	172	65	-	0.9
		2.5	44.5	47.6	M12x65	2	66	-	84	64	172	72	-	1.0
		2.5	50.8	54.0	M12x65	2	66	-	84	64	172	79	-	1.0
		2.5	63.5	66.7	M12x65	2	66	-	86	64	172	91	-	1.1
		2.5	69.9	73.0	M12x65	2	66	95	91	64	172	97	1.3	1.3
150 × 25	165.1 × 33.7	2.5	38.1	41.3	M14x75	2	93	-	108	91	233	65	-	1.5
		2.5	44.5	47.6	M14x75	2	93	-	111	91	233	73	-	1.5
		2.5	50.8	54.0	M14x75	2	93	-	111	91	233	80	-	1.6
		2.5	63.5	66.7	M14x75	2	93	-	113	91	233	93	-	1.6
		2.5	69.9	73.0	M14x75	2	93	120	117	91	233	99	1.8	1.8

• 安装指导请参见AZ-1022号安装资料。

流量特性

支管规格 mm		当量长度 m		流量系数 Kv	
公称直径	实际外径	沟槽支口 EX31	内螺纹支口 EX32	沟槽支口 EX31	内螺纹支口 EX32
25	33.7	-	1.6	-	300
32	42.4	-	1.1	-	700
40	48.3	-	2.8	-	765
50	60.3	-	2.3	-	1500
65	76.1	3.8	4.3	2320	2170

- 流量单位L/min
- 当量长度基于流速3m/s，公称通径，海澄-威廉系数C=120